



Séries "DS"

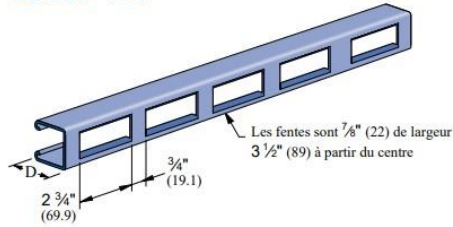

Séries "T"

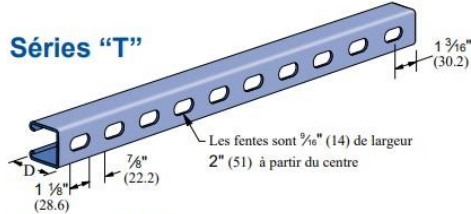


Séries "KO"


Numéro de l'article	Profondeur "D"		Épaisseur du matériel		DS		Poids (lbs/100 pi, kg/100 m)				SL		HS	
	po	mm	po	mm	lbs	kg	lbs	kg	lbs	kg	lbs	kg	lbs	kg
P1000	1 1/2	41	0.105	2.7	173	257	185	275	190	283	185	275	185	275
P1100	1 1/2	41	0.075	1.9	*	*	136	202	140	208	136	202	136	202
P2000	1 1/2	41	0.060	1.5	*	*	113	168	117	174	113	168	113	168
P3000	1 1/2	35	0.105	2.7	*	*	165	245	170	253	165	246	165	246
P4100	1 3/8	21	0.075	1.9	*	*	87	129	*	*	87	129	87	129
P5500	2 1/8	62	0.105	2.7	*	*	242	360	247	368	242	360	242	360

*Non disponible

Séries "SL"

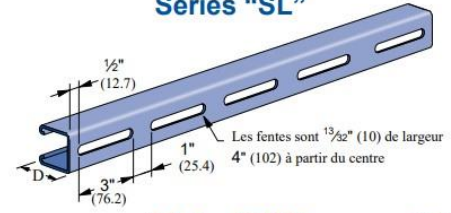

Séries "HS"

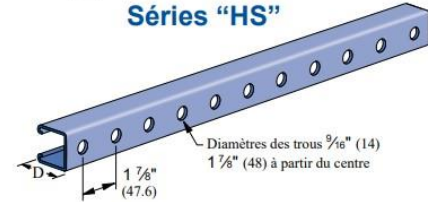

Electrical Metallic Tubing (EMT) and True Color™ EMT

Certified to Canadian Standards Association Safety Standard CSA C22.2 No.83.1
Manufactured in accordance with ANSI C80.3



Trade Size	Metric Designator	Outside Diameter ¹		Nominal Wall Thickness ²		Approximate Weight Per 100 Ft. (30.5M)		Standard Bundle Quantity		True Color** Bundle Qty.	
		in	mm	in	mm	lb	kg	ft	m	ft	m
1/2	16	0.706	17.93	0.042	1.07	30	13.6	2500	762.0	3500	1066.8
3/4	21	0.922	23.42	0.049	1.24	46	20.9	2000	609.6	2500	762.0
1	27	1.163	29.54	0.057	1.45	67	30.4	1000	304.8	1500*	457.2
1-1/4	35	1.510	38.35	0.065	1.65	101	45.8	500	152.4	2000	609.6
1-1/2	41	1.740	44.20	0.065	1.65	116	52.6	500	152.4	1500	457.2
2	53	2.197	55.80	0.065	1.65	148	67.1	510	155.4	1200	365.7
2-1/2	63	2.875	73.03	0.072	1.83	216	98.0	250	76.2	610	185.9
3	78	3.500	88.90	0.072	1.83	263	119.3	200	61.0	510	155.4
3-1/2	91	4.000	101.60	0.083	2.11	349	158.3	100	30.5	370	112.7
4	103	4.500	114.30	0.083	2.11	393	178.3	100	30.5	300	91.5

¹Outside diameter tolerances: +/- .005 in. (.13mm) for size 1/2 (16mm) through 2 (53mm);

+/- .010 in. (.25mm) for size 2-1/2 (63);

+/- .015 in. (.38mm) for size 3 (78);

+/- .020 in. (.50mm) for size 3-1/2 (91) and 4 (103).

NOTE: Length = 10 ft. (3.05m) with a tolerance of +/- .25 in. (6mm)

²For information only. Not a requirement of the CSA standard.

*True Color Blue size 1 (27) bundle quantity: 3000 ft / (914.4m)

** True Color Size 2 (53)- 4 (103) are available through special order

INFORMATION TECHNIQUE

Diamètre	PVC rigide		Aluminium		Acier rigide	
	po	mm	lb/100 pi	kg/100 m	lb/100 pi	kg/100 m

Comparaison de poids - Conduits en PVC rigide

1/2	12	15	23	28	41	79	118
3/4	20	21	31	27	54	105	157
1	25	31	46	53	79	153	228
1-1/4	32	42	63	70	104	201	300
1-1/2	40	53	78	86	129	249	371
2	50	71	106	116	173	334	498
2-1/2	65	112	167	183	272	527	786
3	75	166	248	239	356	690	1029
3-1/2	90	200	298	288	429	831	1239
4	100	236	352	340	507	982	1464
5	125	321	479	465	694	1334	1989
6	150	417	621	613	914	1771	2641