

RELEASE NUMBER	REV	ZONE	REVISION DESCRIPTION	BY	DATE	APPD
P07570-00	F	-	INITIAL PRODUCTION RELEASE	MND	06/30/01	SCN
P10873-25	G	A2	CORRECT MASTER NUMBER	MND	11/01/01	CAC
P16719-14	H	C4	MODIFY BLOWER GND FROM M8 TO M5	MND	11/21/01	CAC
P08715-81	J	-	REVISE A/C CMPSR GND LOCATION	MND	12/13/01	CAC
	J	C4	ADD NEW HARNESS PROPERTIES			
	J	C4	REVISE A/C COMPRESSOR GND LOCATION			

REFERENCE COMPONENTS

BULKHEAD MODULE (MOD32A)
P/N: 06-34529-000
MATING CONN: PAC12110206;24W
PAC15326917;14W


BINARY SWITCH (MOD 702)
P/N: 22-51296-000
MATING CONN: PAC12052644

A/C COMPRESSOR (MOD 130)
P/N: SK14818
MATING CONN: PAC15300027

HVAC CONTROL HEAD (MOD703)
P/N: A22-52355-000
MATING CONN: PAC12047946

BLOWER MOTOR/ACTUATOR MODULE (MOD700)
P/N: A22-52354-002
MATING CONN: PAC12064749;2-WAY
PAC15326110;12-WAY

ITEM NUMBER: G06-34945-000	DESCRIPTION: WRG - HVAC, BASE, M2	FREIGHTLINER LLC					
		THE INFORMATION CONTAINED HEREIN IS PROPRIETARY DATA, AND IS NOT FOR DISSEMINATION OR DISCLOSURE, IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SUBMITTED. EXCEPT AS AUTHORIZED IN WRITING BY FREIGHTLINER CORPORATION.					
		MATERIAL APPROVAL:		DATE:	UNLESS OTHERWISE NOTED, DIMENSIONS AND TOLERANCES ARE DEFINED ACCORDING TO ASME STANDARD Y14.5M-1994, WITH EXCEPTIONS PER FREIGHTLINER EDSM 090G-K17.		
		xxx		xx/xx/xx			
		DRAWN BY:		DATE:			
		M. LOAN		06/30/01			
		CHECKED BY:		DATE:			
		C. BEYER		06/30/01			
		RESPONSIBLE ENGINEER:		DATE:			
		C. BEYER		06/30/01			
		APPROVED BY:		DATE:	THIRD ANGLE PROJECTION		
		S. NADIG		06/30/01	RESPONSIBLE MFG. ENGR: T. MOBERG		
		DESCRIPTION:		DATE:	12/13/01		
		WRG - HVAC,BASE, M2					
		SUPPLEMENTARY DESCRIPTION:					
		70BB4 BUSINESS CLASS SUCCESSOR					
		ITEM/DRAWING NUMBER:		REVISION LETTER:		SHEET NUMBER:	
		G06-34945		J		1 OF 1	

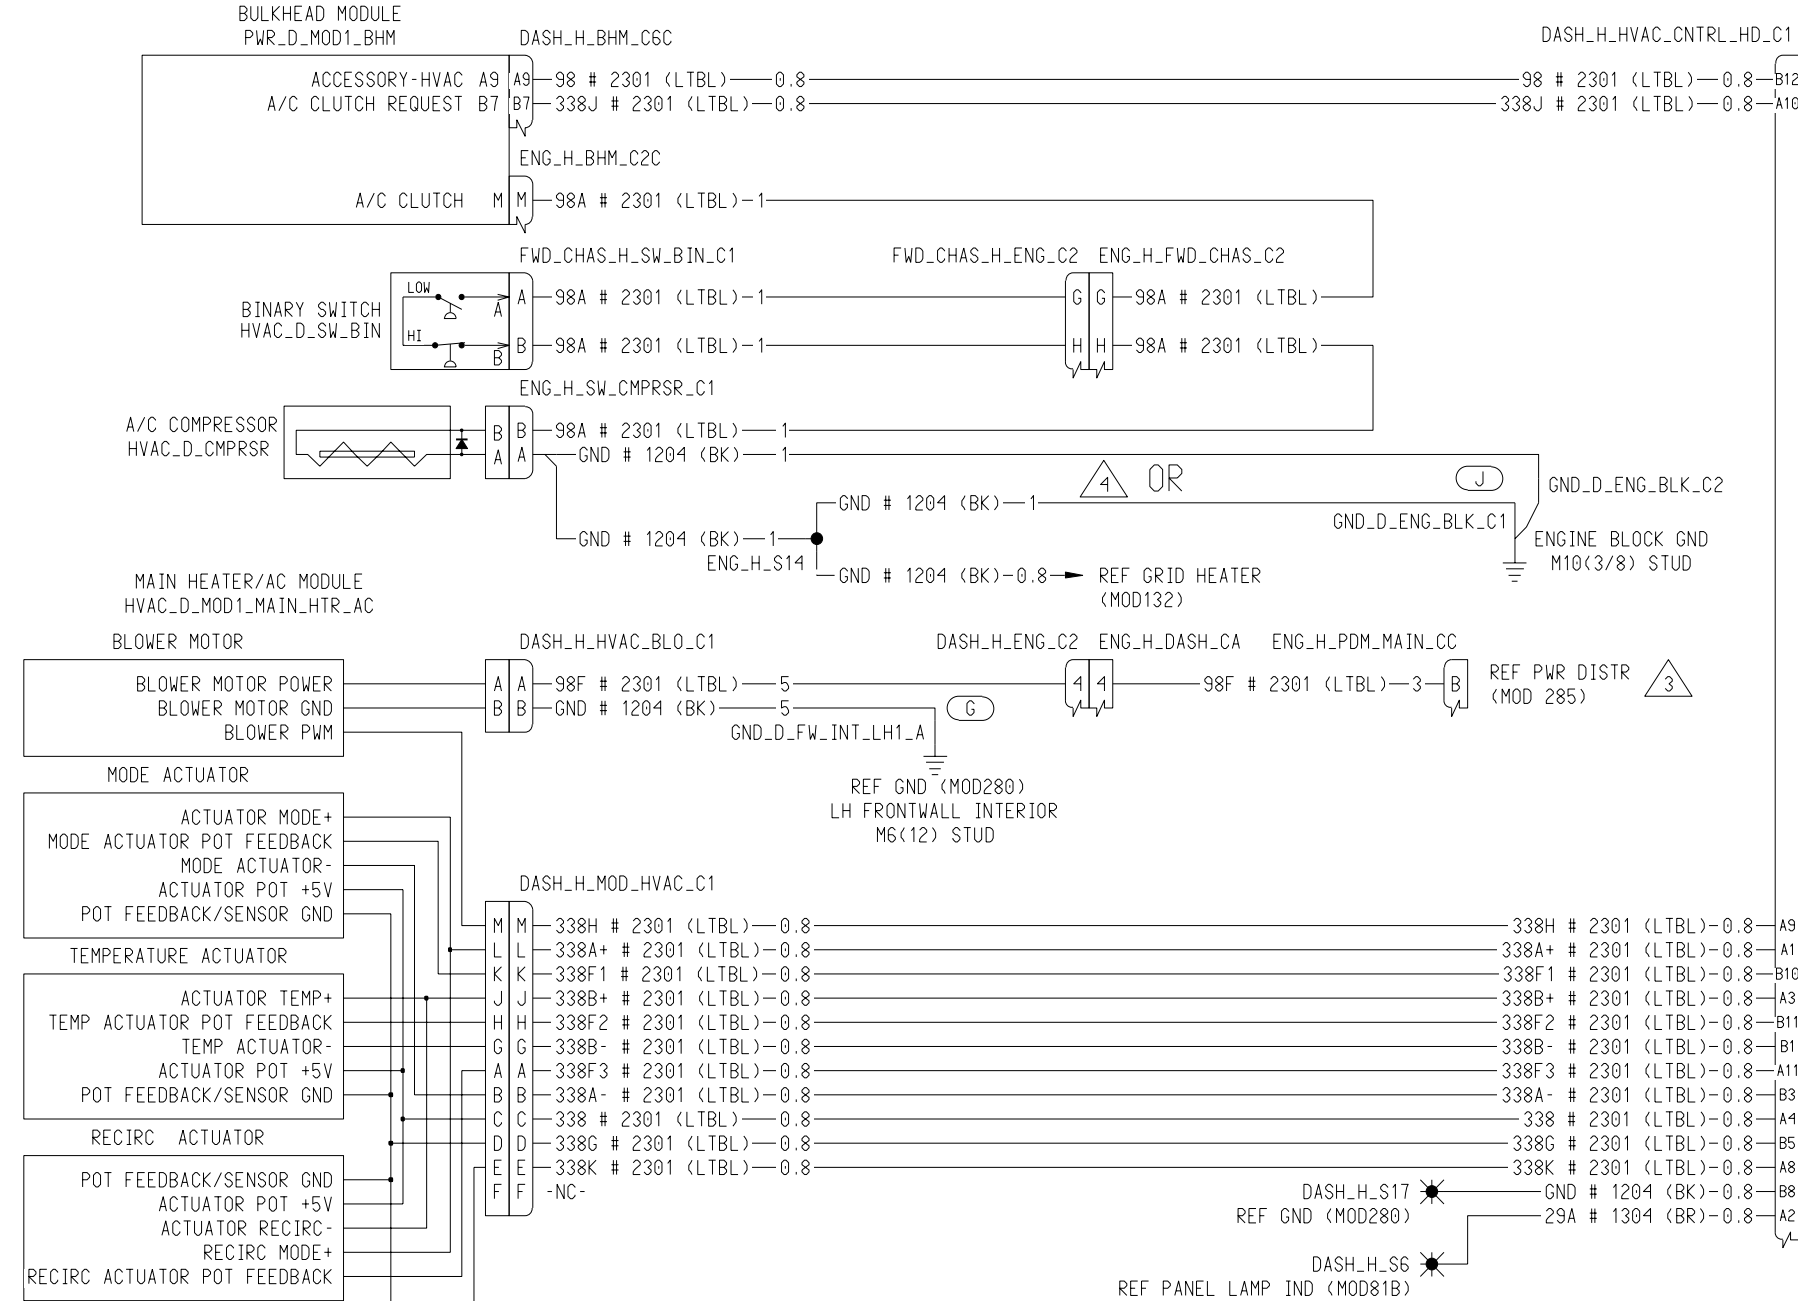

HEATING VENTILATION & AIR CONDITIONING-BASE (HVAC)

- PART NUMBERS SHOWN ARE FOR REFERENCE ONLY, MAY NOT BE INDICATIVE FOR SPECIFIC TRUCK IN PRODUCTION
 - HARNESSES FOUND IN MODULES 286(ENGINE), 320(DASH) AND 288 (CHASSIS)
- 3 BLOWER MOTOR IS PROTECTED WITH 30 AMP FUSE
- 4 CIRCUIT PATH IS DETERMINED BY WITH CAT3126 OR MBE ENGINE

GAUGE/METRIC	AWG
0.35	22
0.50	20
0.80	18
1.00	16
2.00	14
3.00	12
5.00	10
8.00	8
13.00	6
19.00	4
32.00	2
40.00	1
50.00	0
62.00	2/0