


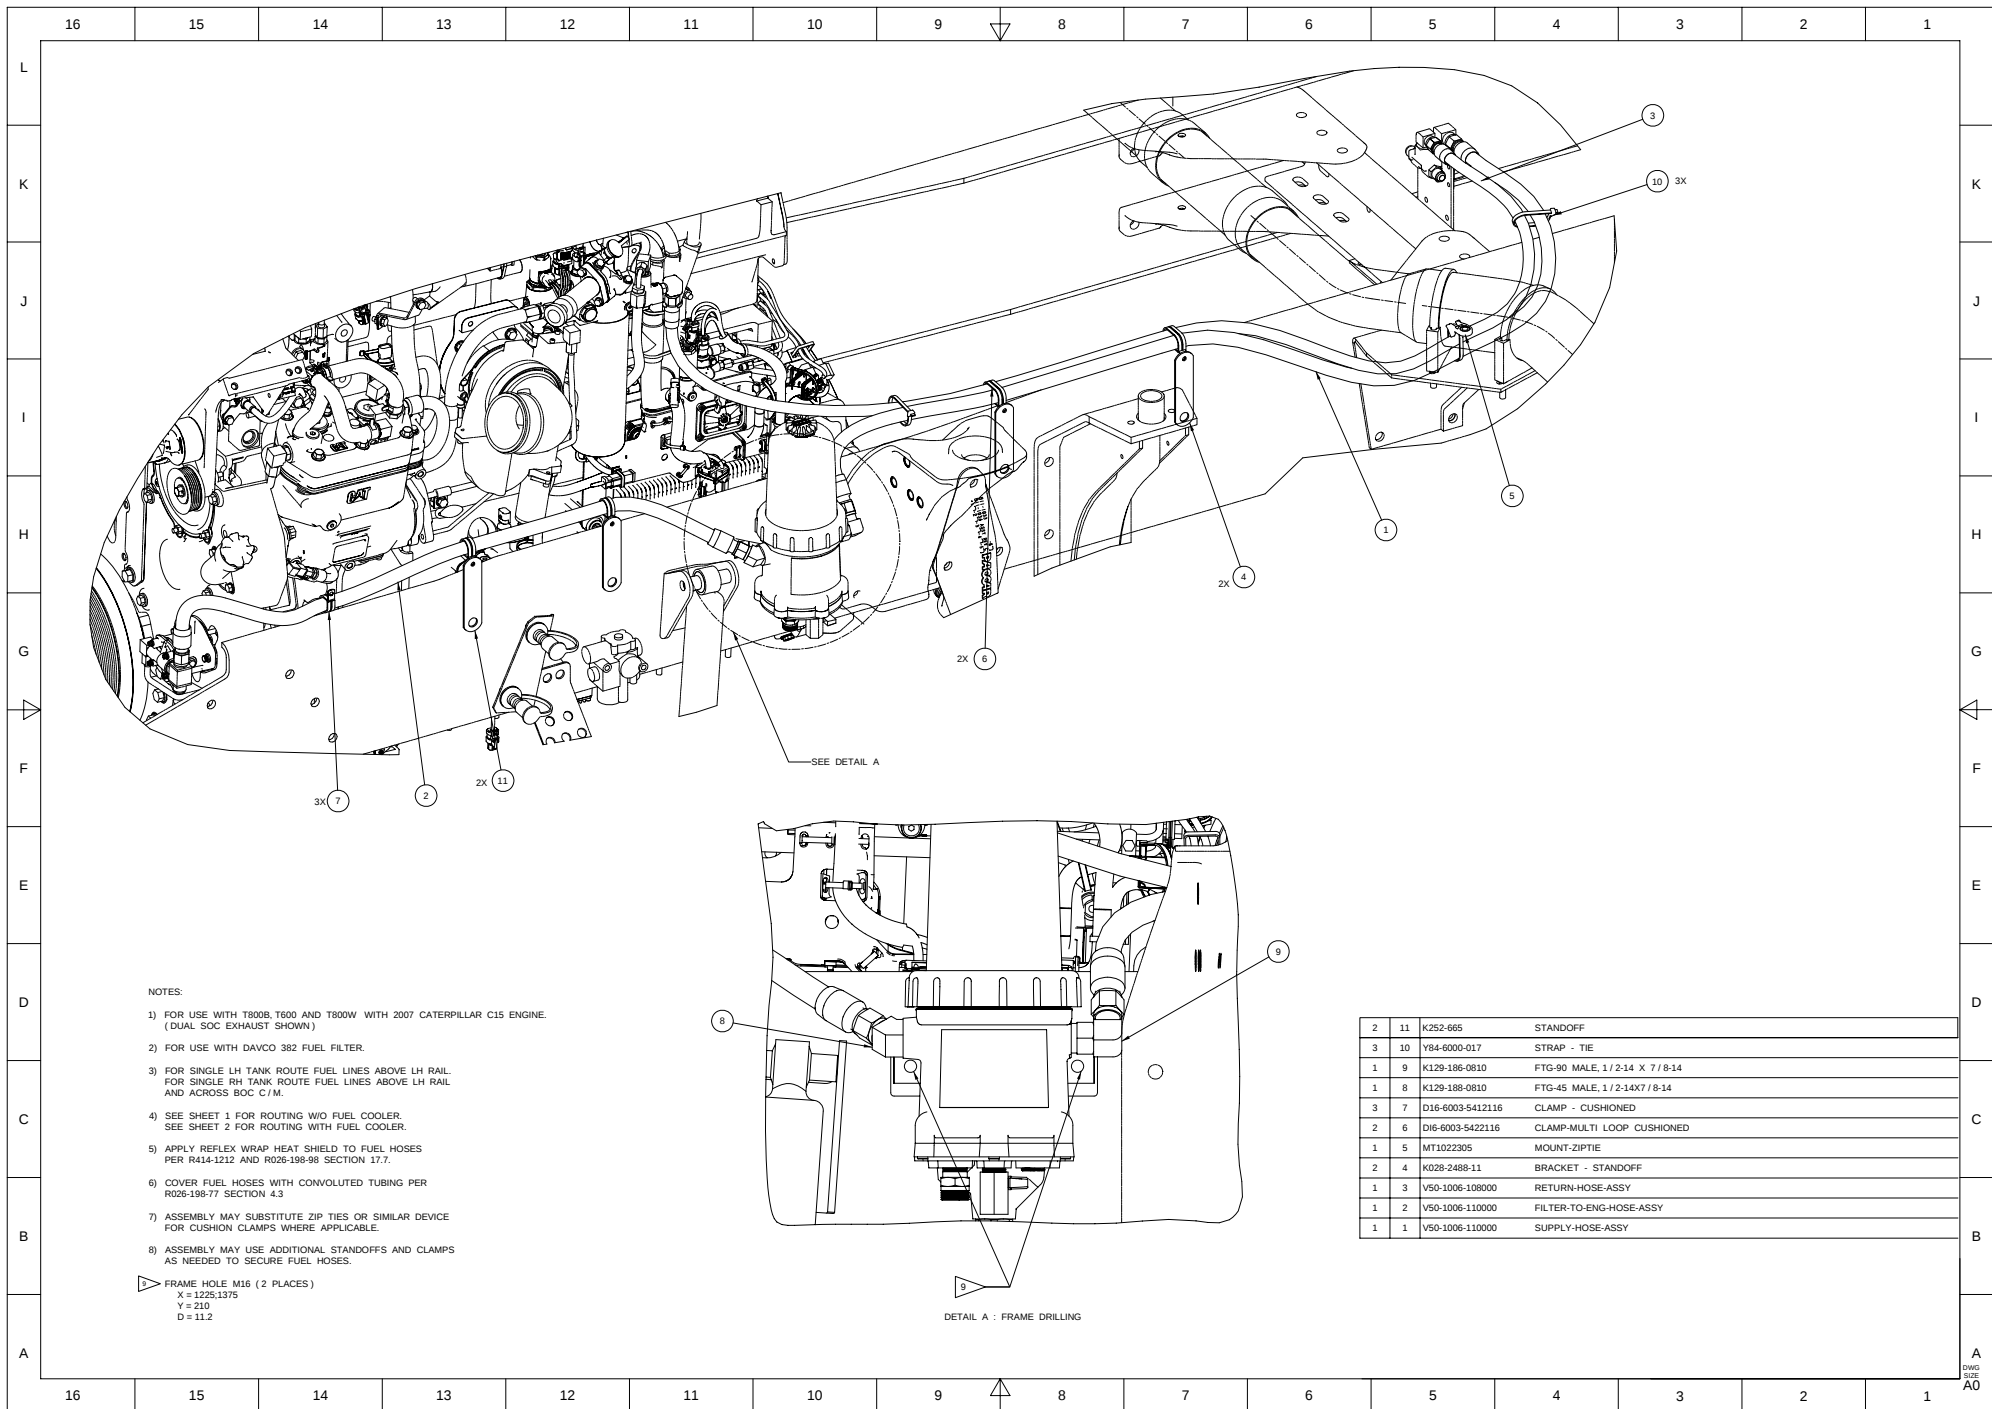

NOTES:

- 1) FOR USE WITH T800B, T600 AND T800W WITH 2007 CATERPILLAR C15 ENGINE.
(DUAL SOC EXHAUST SHOWN)
- 2) FOR USE WITH DAVCO 382 FUEL FILTER.
- 3) FOR SINGLE LH TANK ROUTE FUEL LINES ABOVE LH RAIL.
FOR SINGLE RH TANK ROUTE FUEL LINES ABOVE LH RAIL
AND ACROSS SOC C/M.
- 4) SEE SHEET 1 FOR ROUTING W/O FUEL COOLER.
SEE SHEET 2 FOR ROUTING WITH FUEL COOLER.
- 5) APPLY REFLEX WRAP HEAT SHIELD TO FUEL HOSES
PER R414-1212 AND R026-198-98 SECTION 17.7.
- 6) COVER FUEL HOSES WITH CONVOLUTED TUBING PER
R026-198-77 SECTION 4.3
- 7) ASSEMBLY MAY SUBSTITUTE ZIP TIES OR SIMILAR DEVICE
FOR CUSHION CLAMPS WHERE APPLICABLE.
- 8) ASSEMBLY MAY USE ADDITIONAL STANDOFFS AND CLAMPS
AS NEEDED TO SECURE FUEL HOSES.

▷ FRAME HOLE M16 (2 PLACES)
X = 1225,1375
Y = 210
D = 11.2

2	11	K252-665	STANDOFF
3	10	Y84-6000-017	STRAP - TIE
1	9	K129-186-0810	FTG-90 MALE, 1/2-14 X 7/8-14
1	8	K129-188-0810	FTG-45 MALE, 1/2-14X7/8-14
3	7	D16-6003-5412116	CLAMP - CUSHIONED
2	6	D16-6003-5422116	CLAMP-MULTI LOOP CUSHIONED
1	5	MT1022305	MOUNT-ZIPTIE
2	4	K028-2488-11	BRACKET - STANDOFF
1	3	V50-1006-108000	RETURN-HOSE-ASSY
1	2	V50-1006-110000	FILTER-TO-ENG-HOSE-ASSY
1	1	V50-1006-110000	SUPPLY-HOSE-ASSY

