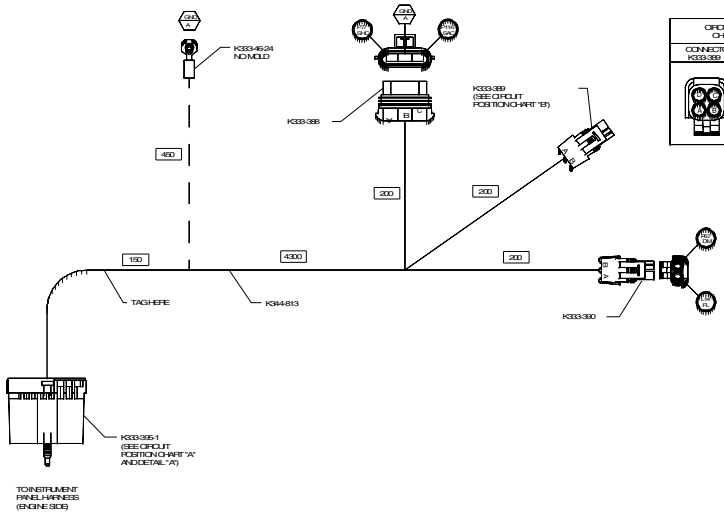

CIRCUIT POSITION CHART "B"

CONNECTOR K333-389	TERM	CIRCUIT
	A	C133FB
	B	C134FB
	C	C136FB
	D	C135FB

GENERAL NOTES:

1) USE ON B, BL, BIII CABS WITH 45"/50"/60" MODULAR SLEEPERS WITHOUT FULL TRAILER CABLE. USE WITH CUMMINS "ISX" SERIES ENGINES OR CAT C10, C12, 3406E ENGINES WITH ADEM III ECU

2) HARNESS SHALL CONFORM TO R026-170-18.

3) HARNESS SHALL CONFORM TO R026-170-146.
- ALL CONDUCTORS TO BE GXL EXCEPT IF NOTED IN THE MATERIAL DESCRIPTION BLOCK.
- TERMINAL LUBRICATION PER 46B
- HARNESS COMPONENTS PER 31C.

4 THE FOLLOWING PAIRS OF CIRCUITS ARE TO BE TWISTED PAIRS:
C133FB & C136FB
C134FB & C135FB

CIRCUIT POSITION CHART "A"

CONNECTOR K333-395-1	TERM	CIRCUIT	FUNCTION
	A		PLUG
	B		PLUG
	C		PLUG
	D		PLUG
	E		PLUG
	F		PLUG
	G		PLUG
	H		PLUG
	I		PLUG
	J	C133FB	RADIO SPEAKER GND RH
	K	C134FB	RADIO SPEAKER GND LH
	L	C135FB	RADIO SPEAKER OKT RH
	M	C136FB	RADIO SPEAKER OKT LH
	N	P773HA	SLEEPER HEAT
	O	P775HB	SLEEPER HEAT
	P	P570M	DOME LAMP SLEEPER
	Q	P1169AA	SLEEPER ACCESSORIES
	R	P1169AB	SLEEPER ACCESSORIES
	S	L14FL	FLOOD LAMP OKT
	T	PLUG	
	U	PLUG	
	V	PLUG	

DETAIL "A"

K333-395-1



QTY	PART NUMBER	COFC			NOTES
1	OKT GND (A)	S	3.0 (12 GA)		
1	OKT C133FB	S	1.0 (16 GA)		
1	OKT C135FB	S	1.0 (16 GA)		
1	OKT C134FB	S	1.0 (16 GA)		
1	OKT C136FB	S	1.0 (16 GA)		
1	OKT P1169AC	S	5.0 (10 GA)		
1	OKT P1169AB	S	3.0 (12 GA)		
1	OKT P1169AA	S	3.0 (12 GA)		
1	OKT P773HC	S	5.0 (10 GA)		
1	OKT P773HB	S	3.0 (12 GA)		
1	OKT P775HA	S	3.0 (12 GA)		
1	OKT P570M	S	3.0 (12 GA)		
1	OKT L14FL	S	3.0 (12 GA)		

QTY	PART NUMBER	COFC		NOTES
AR	VINYL TAPE		ADHESIVE BACKED	
AR	K344-813		CONVOLUTED TUBING	
AR	K231-353-203		TIE STRAP	
1	K333-395-1		CONNECTOR	
1	K333-390		CONNECTOR	
1	K333-389		CONNECTOR	
1	K333-388		CONNECTOR	
1	K333-46-24		CONNECTOR NO MOLD	

Sleeper Harness (modular), T600, T800, W900, C500B
K068-6506
Sheet 1 of 1