


Power supply and ground of EAS-3 actuator (D375)

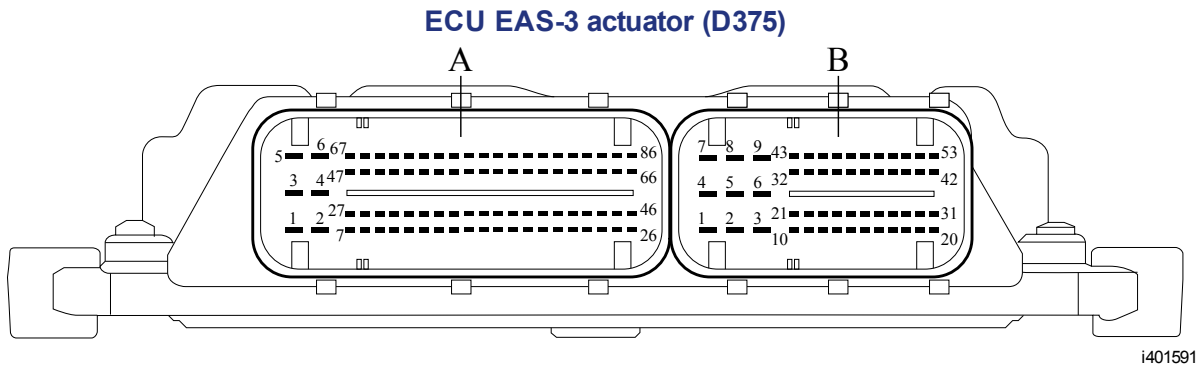

A	Electronic unit connection point				
B	Description of connection point				
C	Reading at connection point (Ubat = battery voltage)				
D	Measuring unit				
E	Explanatory notes (if applicable)				
F	The 'X' indicates that additional information is available in 'Technical Data.'				
A	B	C	D	E	F
B01	Electronic unit ground	<0.5	VDC	Voltage loss measurement with as many consumers as possible switched on	
B02	Electronic unit ground	<0.5	VDC	Voltage loss measurement with as many consumers as possible switched on	
B03	Electronic unit ground	<0.5	VDC	Voltage loss measurement with as many consumers as possible switched on	
B04	Electronic unit ground	<0.5	VDC	Voltage loss measurement	

				with as many consumers as possible switched on	
B05	Electronic unit ground	<0.5	VDC	Voltage loss measurement with as many consumers as possible switched on	
B06	Power supply before contact	Ubat	VDC		
B07	Power supply before contact	Ubat	VDC		
B08	Power supply before contact	Ubat	VDC		
B09	Power supply before contact	Ubat	VDC		
B52	Power supply after contact	Ubat	VDC		

M026988 - 02.23.2010

This information applies exclusively to the entered chassis number or the selected engine type. Please take into account that this information may change daily. Therefore the provided information is only valid on 12-16-2015. You cannot derive any rights from the information provided with respect to vehicles and/or components of another series, with another chassis number, and/or of another date. (/)