
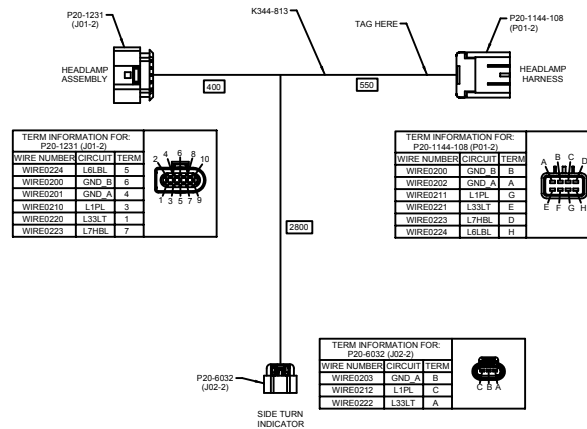


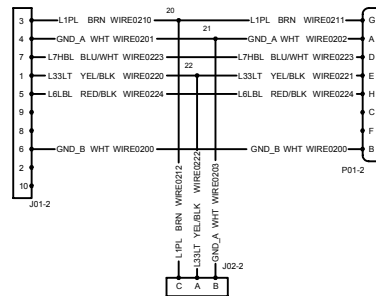

GENERAL NOTES:

- 1) USE ON T600 WITH T-SERIES REFRESH HOOD.
- 2) HARNESS SHALL CONFORM TO R026-170-18.
- 3) HARNESS SHALL CONFORM TO R026-170-146.
- ALL CONDUCTORS TO BE GXL UNLESS NOTED OTHERWISE
- HARNESS COVERINGS PER 9.0C
- 4) LABELS SHALL BE APPLIED TO THE HARNESS WITHIN 75mm OF THE BASE OF EACH CONNECTOR. THE LABELS SHALL BE CLEARLY VISIBLE UPON COMPLETION OF THE HARNESS. PRINT LABELS WITH THE CORRESPONDING STATEMENT AND "REF_DES". LABELS TO BE WHITE UNLESS OTHERWISE NOTED.
- 5) PART MARKING AND TRACEABILITY REQUIREMENTS SHALL COMPLY WITH R026-198-146 AND APPLY THE KENWORTH TRADEMARK AS DESCRIBED IN R026-198-120.

WIRE INFORMATION FOR HARNESS: P92-2817

WIRE NAME	CIRCUIT CODE	FROM COMPONENT	TERM	TO COMPONENT	TERM	C OF C	WIRE SIZE	WIRE GAUGE	WIRE TYPE	DESCRIPTION
WIRE0200	GND_B	P01-2 P20-1144-108	B	J01-2 P20-1231	6	S	2.0mm ²	(14)	GXL	GROUND
WIRE0201	GND_A	J1 SPICE	1	J01-2 P20-1231	4	S	2.0mm ²	(14)	GXL	GROUND
WIRE0202	GND_A	P01-2 P20-1144-108	A	J1 SPICE	1	S	2.0mm ²	(14)	GXL	GROUND
WIRE0203	GND_A	J02-2 P20-6032	B	J1 SPICE	1	S	1.0mm ²	(16)	GXL	GROUND
WIRE0210	L1PL	20 SPICE	1	J01-2 P20-1231	3	S	1.0mm ²	(16)	GXL	PARK LAMP
WIRE0211	L1PL	P01-2 P20-1144-108	G	20 SPICE	1	S	1.0mm ²	(16)	GXL	PARK LAMP
WIRE0212	L1PL	20 SPICE	1	J02-2 P20-6032	C	S	1.0mm ²	(16)	GXL	PARK LAMP
WIRE0220	L33LT	22 SPICE	1	J01-2 P20-1231	1	S	1.0mm ²	(16)	GXL	LEFT TURN
WIRE0221	L33LT	P01-2 P20-1144-108	E	22 SPICE	1	S	1.0mm ²	(16)	GXL	LEFT TURN
WIRE0222	L33LT	22 SPICE	1	J02-2 P20-6032	A	S	1.0mm ²	(16)	GXL	LEFT TURN
WIRE0223	L7HBL	P01-2 P20-1144-108	D	J01-2 P20-1231	7	S	1.0mm ²	(16)	GXL	HIGH BEAM (LH)
WIRE0224	L6LBL	J01-2 P20-1231	5	P01-2 P20-1144-108	H	S	2.0mm ²	(14)	GXL	LOW BEAM LAMP

COMPONENT INFORMATION FOR HARNESS: P92-2817

REF_DES	QTY	PART NUMBER	NUMBER OF CAVITIES	DESCRIPTION
J01-2	-	P20-1231	10	BLACK FEP 2.8 SERIES SEALED
J02-2	-	P20-6032	3	BLACK PACKARD GT 280 SEALED
P01-2	-	P20-1144-108	8	BLACK PACKARD GT 280 SEALED
-	AR	VINYL TAPE	-	ADHESIVE BACKED
-	AR	K344-813	-	CONVOLUTED TUBING